
## Trim installation


UNFOLD FULLY TO READ

### 01 Separate the frame

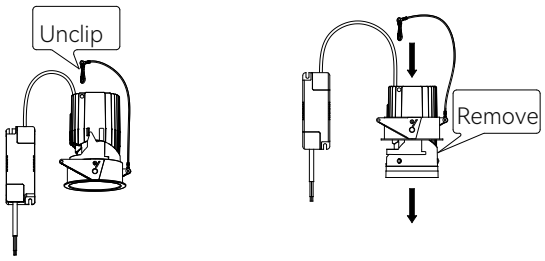



Isolate the mains supply. Release the safety clip and separate the luminaire body from the mounting frame.

### 02 Prepare the opening

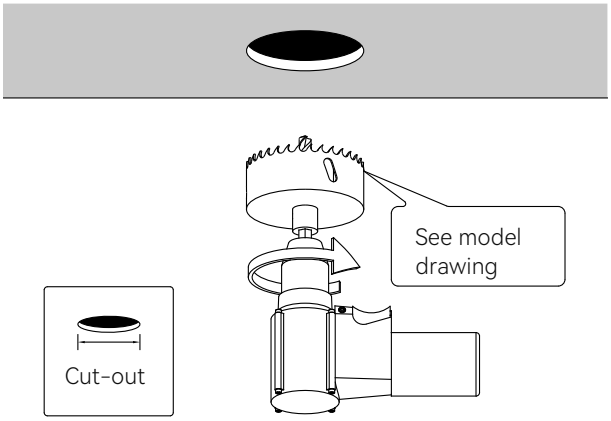



Prepare the opening specified for the supplied model. Check ceiling thickness, cut-out size and clearance against its technical drawing.

### 03 Insert and seat the frame

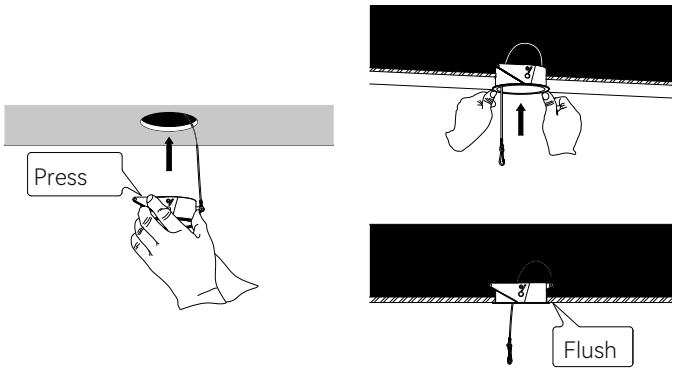


Press both spring clips inward. Insert the clips into the opening and push the frame fully flush with the ceiling.

### 04 Connect and fit

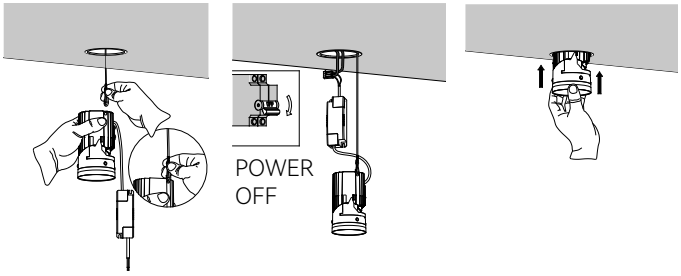


Safety cable Connect Push flush

Attach the safety cable. With power isolated, connect and position the driver above the ceiling. Push the luminaire into the frame until it sits flush; check that it is secure.


POWER OFF before any work.

Electrical work: qualified electrician only.

# Trimless installation


UNFOLD FULLY TO READ

## 01 Prepare and fix the frame

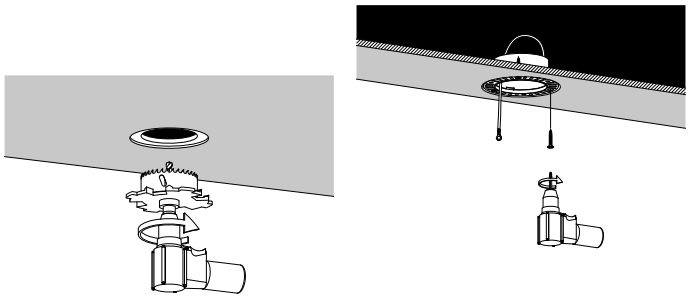


Use the model-specific stepped opening in the confirmed technical drawing. Insert the mounting frame and secure it with the three screws shown.

## 02 Finish the ceiling

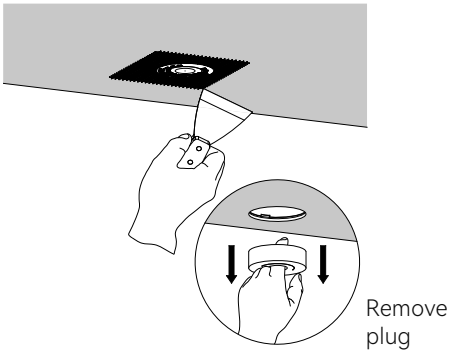



Fit the protective plug, apply mesh and filler, then sand and paint. Remove the plug and clean the opening.

## 03 Attach the safety cable

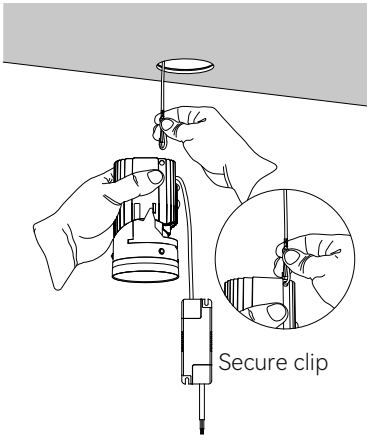


Clip the safety cable to the luminaire and check that the connection is secure.

## 04 Connect and fit

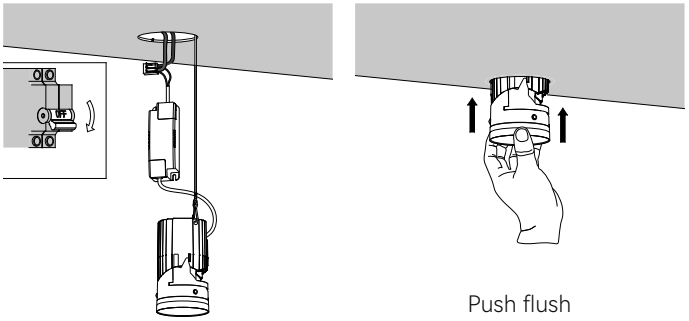


With power isolated, connect and position the driver above the ceiling. Push the luminaire into the mounting frame until it sits flush; check that it is secure.

POWER OFF before any work.

Electrical work: qualified electrician only.