
Trim / Spring clips


UNFOLD FULLY TO READ

01 Prepare the opening

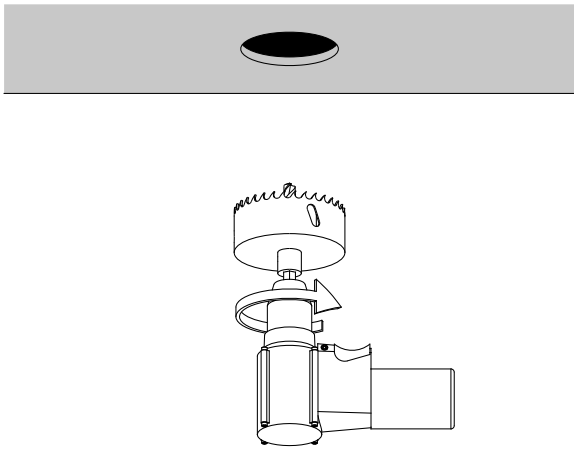

Switch off the mains supply. Prepare the model-specific cut-out shown in the technical drawing. Check ceiling thickness and clearance.


02 Connect the driver

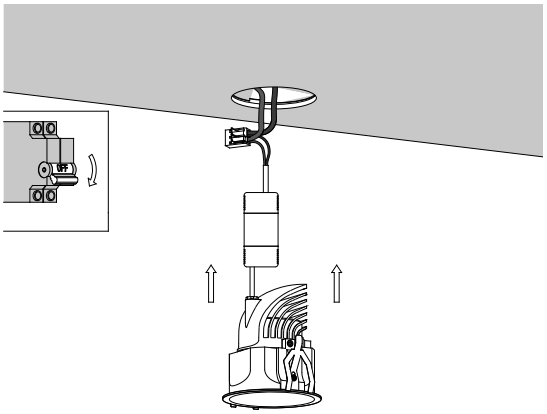

POWER OFF


With the mains supply switched off, connect the luminaire and driver. Position the driver above the ceiling.

03 Press the spring clips

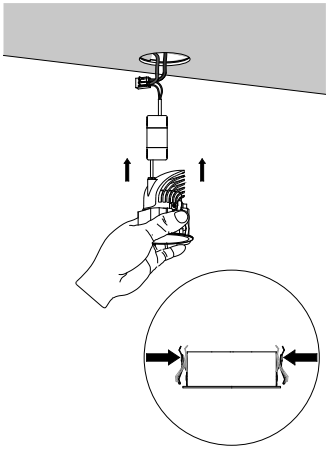

Press both spring clips inward as shown. Keep the clips compressed while inserting the luminaire into the opening.

04 Push flush and check

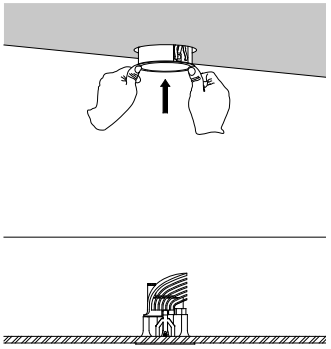

Push the luminaire up until the frame sits flush with the ceiling. Check that both spring clips hold securely and the luminaire is level.

POWER OFF before any work.

Electrical work: qualified electrician only.