
Trim installation


UNFOLD FULLY TO READ

01 Separate the frame

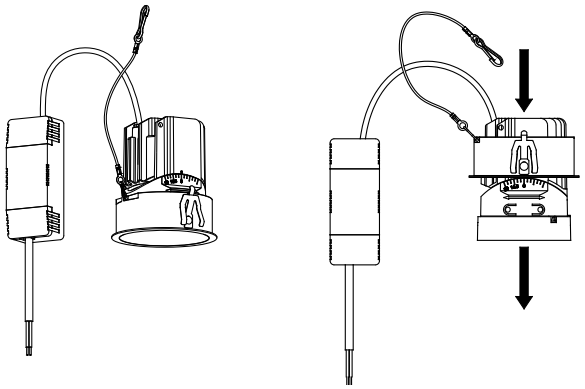


Switch off the mains supply. Release the safety clip and separate the luminaire body from the mounting frame.

02 Prepare the opening

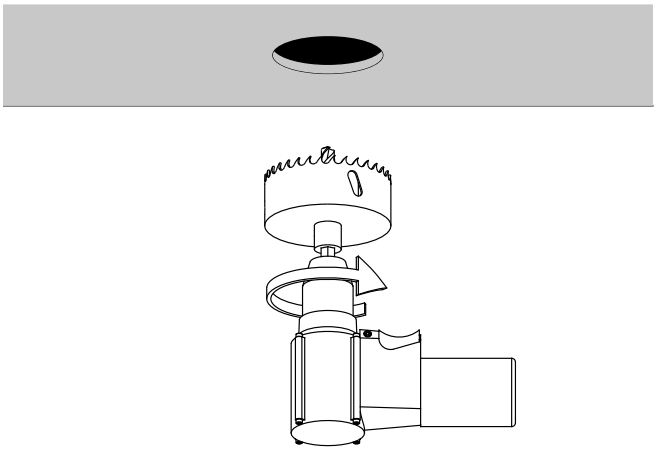


Prepare the cut-out specified for the supplied model. Check the ceiling thickness and clearance against its technical drawing.

03 Insert and seat the frame

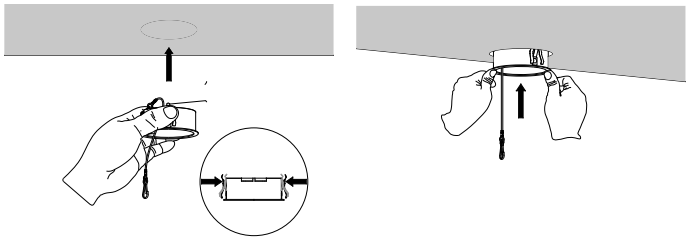

Press both spring clips inward. Insert the clips into the opening and push the frame fully flush with the ceiling.

04 Connect and fit

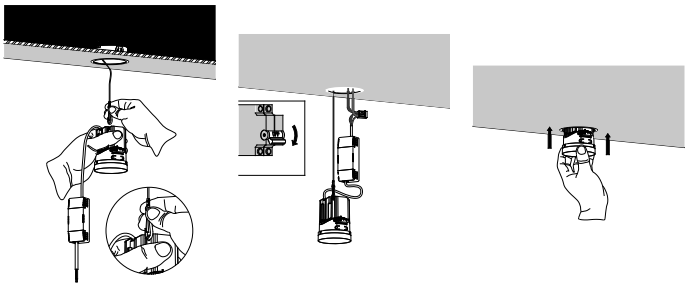

Safety cable POWER OFF Push flush

Attach the safety cable. With the mains supply switched off, connect and position the driver above the ceiling. Push the luminaire into the frame until flush; check that it is secure.


POWER OFF before any work.

Electrical work: qualified electrician only.

Trimless installation


UNFOLD FULLY TO READ

01 Prepare and fix the frame

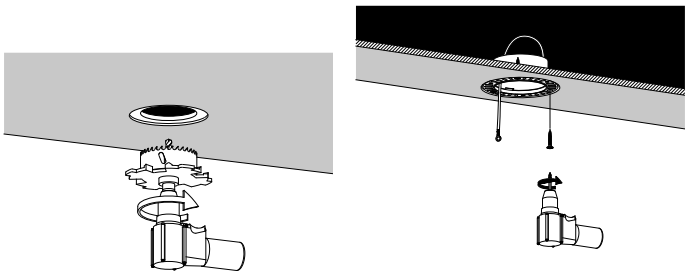


Prepare the stepped opening shown in the model-specific technical drawing. Insert the mounting frame and secure it to the ceiling with the three screws shown.

02 Finish the ceiling

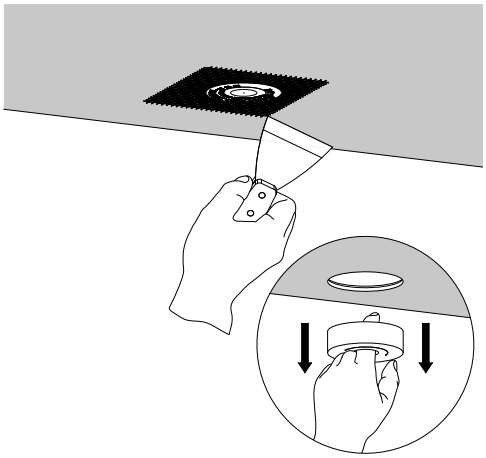


Fit the protective plug, apply mesh and filler, then sand and paint. Remove the plug and clean the inside of the mounting frame.

03 Attach the safety cable

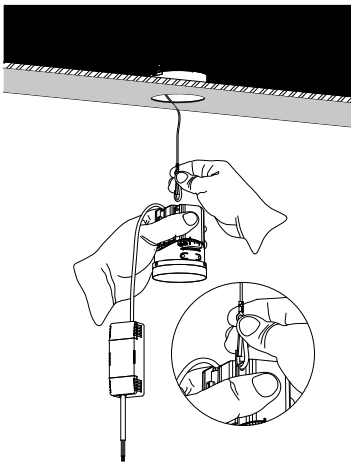


Clip the safety cable to the luminaire and check that it is securely attached.

04 Connect and fit

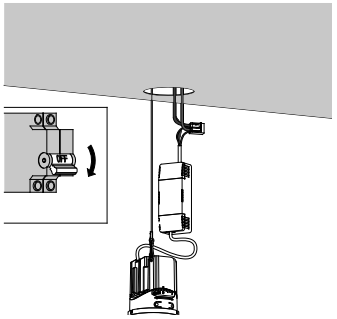

POWER OFF

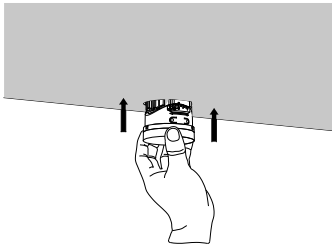

Push flush

Switch off the mains supply before connecting. Position the driver above the ceiling. Push the luminaire into the mounting frame until it sits flush; check that it is secure.

POWER OFF before any work.

Electrical work: qualified electrician only.